


DTX5L-BS

Specifications

Model NO .	DTX5L-BS	
Same Dimensions As YUASA Model	YTX5L-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	4 Ah	
Dimension	Length	114 mm (4.49 inches)
	Width	70 mm (2.76 inches)
	Height	106 mm (4.17 inches)
	Total Height	106 mm (4.17 inches)
Approx. Weight W/O . ACID	1.50 kg (3.31 Lbs)	
Approx. ACID Per Battery	0.26L	
Charge Current (A)	0.4 A	



Dimensions

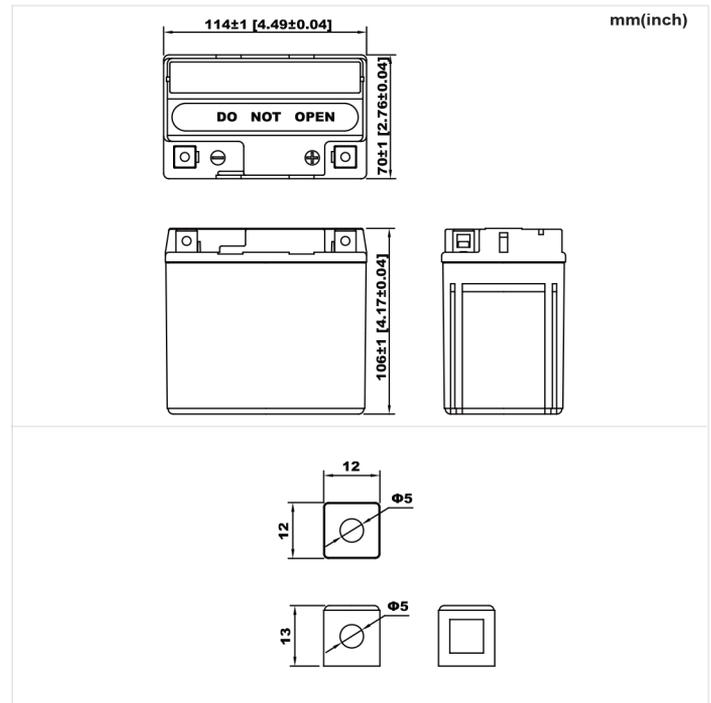

Characteristics

Capacity 25°C(77°F)	10hours rate (0.4 A to 10.5V)	4.0 Ah
	5hours rate (0.8 A to 10.2V)	3.4 Ah
	1C (4.0 A to 9.6V)	1.8 Ah
	3C (12.0 A to 9.6V)	1.4 Ah
Cold Cranking Amperes(-18°C SAE Standard)	55 A	
Cold Cranking Amperes(-18°C EN Standard)	83 A	
Internal Resistance (at 1KHz)	Approx.9.0m Ω	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	

(V) FOR 12V BATTERY

Discharge Time VS. Discharge Current(25 °C)

